


QUICK-START GUIDE TO USING VISIOMOBILE GLOBAL


I/ AUTHENTICATION

Open your web browser (Internet Explorer or other browser).
 Type in the following URL: www.innovatys.co.uk
 Enter your username and password as supplied on installation.

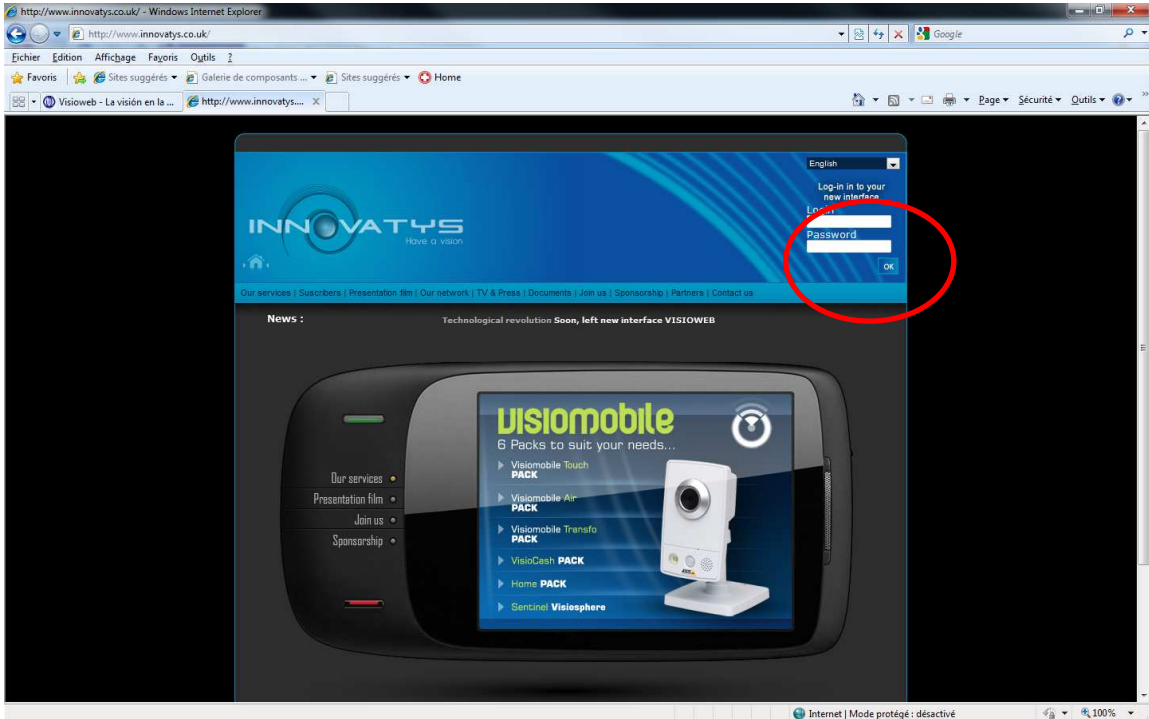


II/ PRESENTATION OF THE INTERFACE

After authentication is complete, your viewing console should appear as shown here.

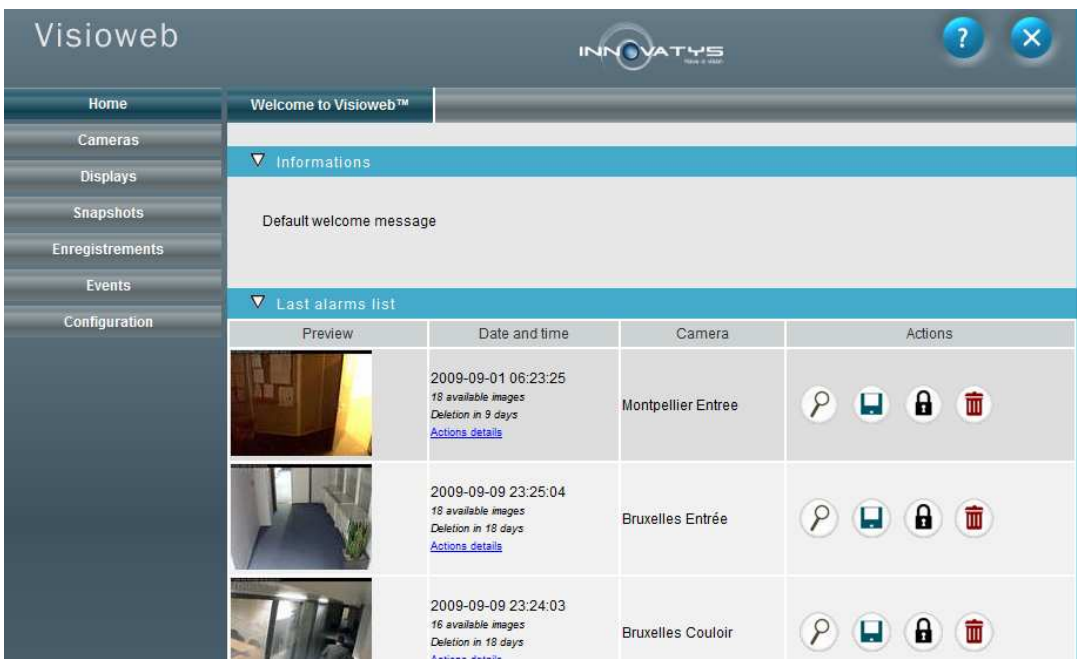

FOCUS on functionalities

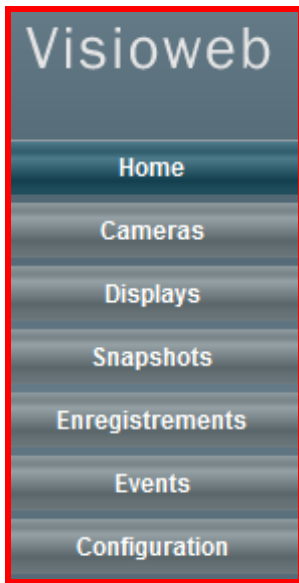

Allows direct access to each camera one by one

Allows multiple display of camera feeds as required

Provides access to photos taken live using your cameras

Provides access to **all** recordings made using the TSMT

Provides access to **all** your alarms

Allows you to change your site access password and to access your VisioBox



View an alarm



Record an alarm on your computer



Protect an alarm (here, the alarm is not protected).




Here, the alarm is protected





Delete alarms

III/ CAMERA BUTTON

Clicking on the "camera" button brings up the list of all your cameras. Clicking on a miniature provides direct access to the camera in question.

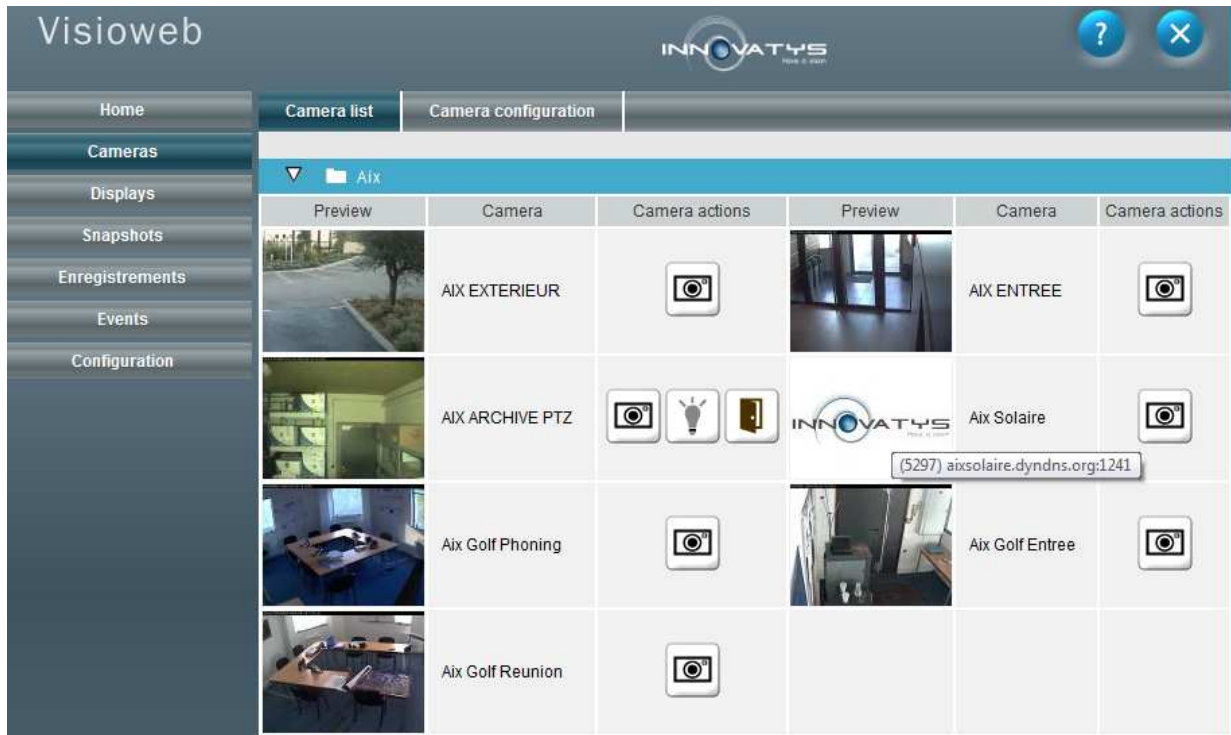

Clicking on the image in the resulting window enlarges the image to full-screen. Use the camera icon on the right of the image to take a photo of the image.

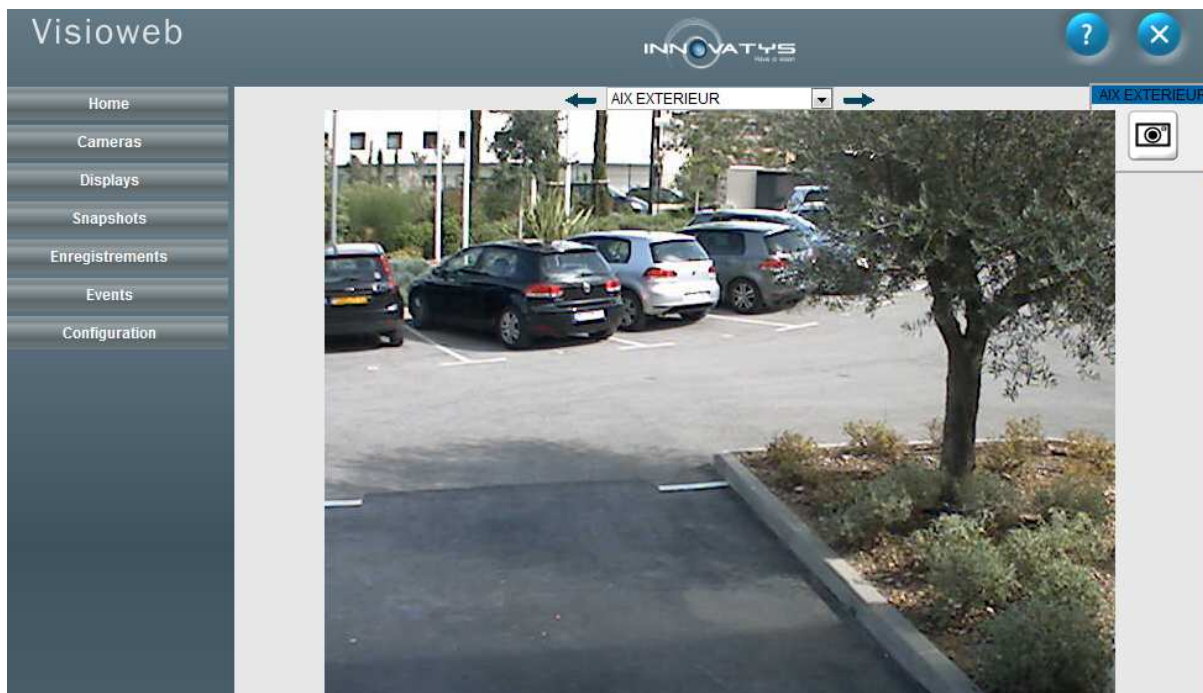

Use the arrows to move from one camera to another.

Other buttons are available depending on which options have been chosen in the contract:



Door contact management (for existing contact)

Enable detection by camera

Disable detection by camera

Switch on a light

Switch off a light



Control panel for rotating camera (PTZ).

This panel enables you to control camera movement from left to right and upwards and downwards.

The + and - magnifying glasses control camera zoom.

Presets can be created using the + icon to add the position currently being displayed. The - icon deletes the selected preset.



This icon appears on all cameras and enables you to take a photo during camera viewing


IV/ DISPLAY BUTTON

The display button allows you to create and use custom displays.



Display	Description	Preview
3		<input type="checkbox"/>
issy		
aix		
test1		

To create a display, click on the "display settings" button, then on "create new display". This brings up the list of your cameras. Click on a camera size and drag it to the grid. Depending on the size of camera selected, other cameras may be added.

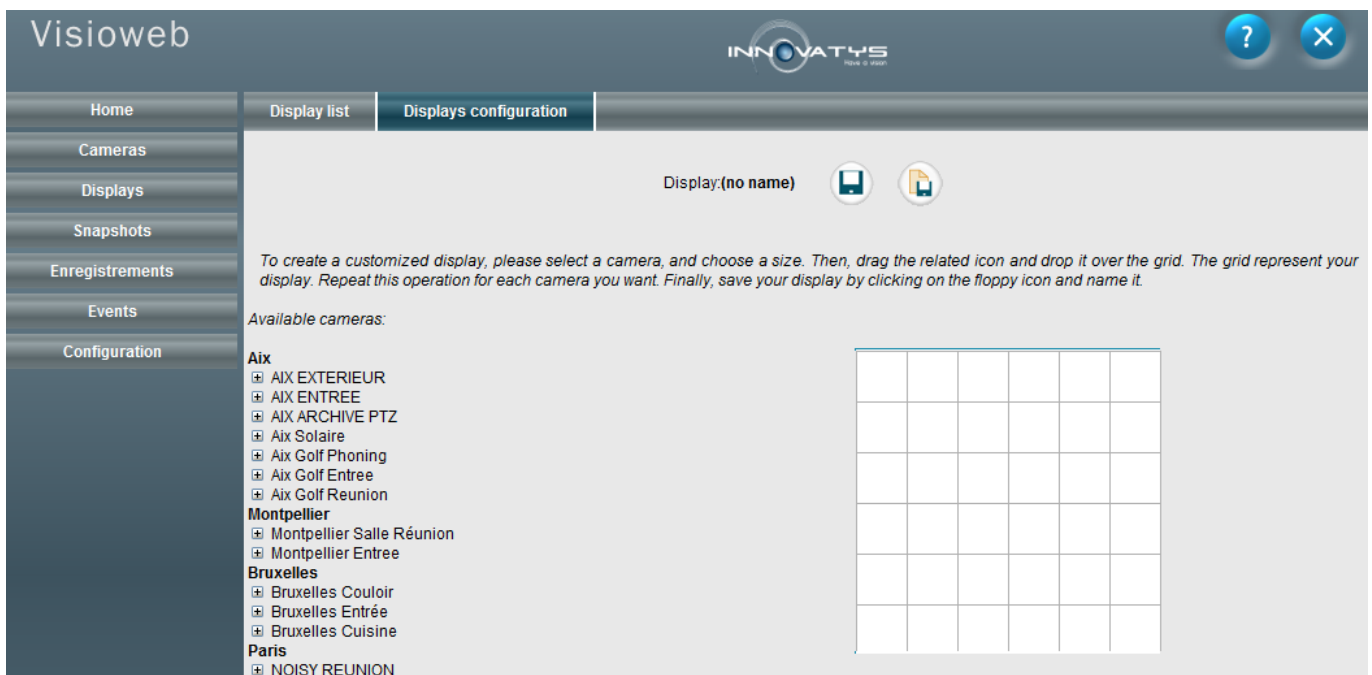

Display:(no name)

To create a customized display, please select a camera, and choose a size. Then, drag the related icon and drop it over the grid. The grid represent your display. Repeat this operation for each camera you want. Finally, save your display by clicking on the floppy icon and name it.

Available cameras:


- Aix**
 - AIX EXTERIEUR
 - AIX ENTREE
 - AIX ARCHIVE PTZ
 - Aix Solaire
 - Aix Golf Phoning
 - Aix Golf Entree
 - Aix Golf Reunion
- Montpellier**
 - Montpellier Salle Réunion
 - Montpellier Entree
- Bruxelles**
 - Bruxelles Couloir
 - Bruxelles Entrée
 - Bruxelles Cuisine
- Paris**
 - NOISY REUNION



Click on the disk icon to save the selected display setting.


V/ SNAPSHOTS BUTTON

Clicking on Snapshots brings up a view of all photos taken, up to a maximum of 50 pictures. To add new photos thereafter, delete some of the existing ones.

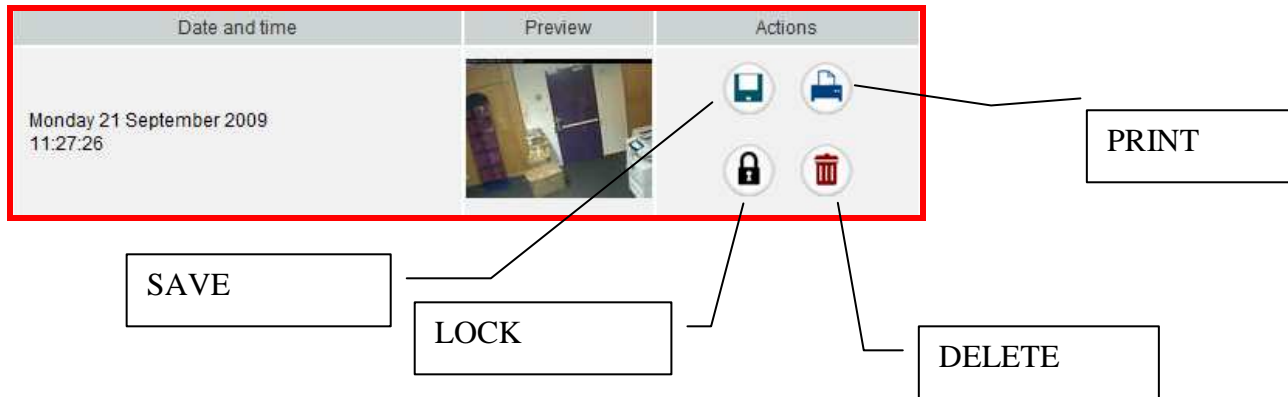

VI/ RECORD BUTTON

This section enables you to view and delete recordings triggered by your TSM Touch as well as save them to your computer.

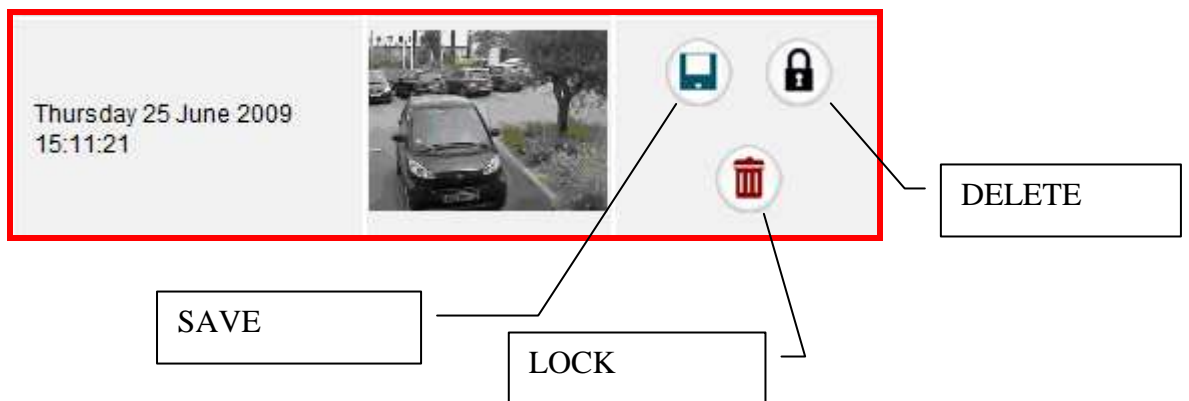

To view the recording, click on the miniature. This requires video playback software (such as Windows Media Player, Quicktime, VLC, etc) to be installed on your computer.

**Note: Recordings are triggered by TSM Touch.
Recordings cannot be launched from VisioWeb.**

VII/ EVENTS BUTTON

This section enables you to view and delete alarms. Alarms are displayed in a series of 10-15 images which can be replayed or saved to your computer.

Note: A maximum of 50 alarms can be stored on the server. Non-protected alarms are automatically deleted after 10 days.

Information: There is an "inhibition" time between each text message generated by alarms received on this interface. No more than one text message per hour can be sent.

VIII/ SETTINGS BUTTON

This allows access to your account information; you can change your password by clicking "change".

You can access your Visibox (where applicable) via this link:

Recording servers	<ul style="list-style-type: none">• VisiboxDemo• VisiboxDemo2• Aix en Provence• Noisy
-------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

End